

microLink

Smart Pickoff for Turbine Flowmeters

Description

FTI's microLink pickoff may be the worlds smallest & most compact temperature/viscosity/density compensated linearized CANbus turbine pickoff: It may be *micro* but it has mega capabilities! A linearized flow output (mass or volume) is provided via a user configurable pulse output as well as via CANbus digital communication. Up to three fluid density/viscosity profiles can be stored in microLink enabling the user to seamlessly switch between fluids on the fly. The microLink is easily configured using and all data is available using Windows®-based Visual Link™ programming software.

Features

- *micro* packaging - weighs only 65 grams
- Wide operating temperature -40°C to 125°C standard
- Enhanced RF amplifier design
- Advanced averaging capabilities
- Viscosity, temperature & linearized pulse output
- CANopen in accordance with CiA 301 v4.0.2
- 3 user configurable fluid viscosity/density tables
- Solid state temperature sensor with direct digital output
- 0 to 5000 Hz user-defined frequency output
- Raw frequency output - no latency
- Fast response time < 20mS plus period of input pulse on corrected volume/mass output
- 2 volume and 2 mass totals
- PDO information available over CANbus at access speeds up to 20mS (mass & volume rate, temperature, frequency)
- Visual Link™ compatible including diagnostic portal
- RoHS compliant

Diagnostic Capabilities

- Error register & history including max speed
- Set linearized frequency to known value
- Fault temperature setting
- Poll intermediate results such as f/v, Roshko correction factor, Strouhal Correction Factor, initial k-factor, corrected k-factor, Linearized frequency
- View real-time flow information using Visual Link™



Specifications

Input Freq. Range	5 to 2500 Hz typical
Input Power	9 to 30VDC, 60mA max, 600mW@24VDC
Temperature	-40 to 125 °C
Humidity	0 to 85% RH non-condensing
Accuracy	
<i>Linearized Freq.</i>	0.1% of reading or better
<i>Temperature</i>	+/-0.25 °C (typical): Installed process temperature accuracy ~ +/- 2.0°C (increased accuracy possible with user calibration)
Linearization	
<i>Latency</i>	< 20ms + period of input pulse
<i>Flow meter K-factor</i>	2 to 30 pts, linear interpolation
<i>Viscosity</i>	2 to 20 pts per fluid, Linear interpolation, Correlation by ASTM D341-93, Andrade's equation or user defined
<i>Density</i>	2 to 20 pts per fluid, linear interpolation
Outputs	
<i>Frequency raw</i>	0-5 VDC pulse
<i>Frequency linearized</i>	0-5 VDC pulse (0 to 5000 Hz)
Communications	
<i>Interface</i>	CAN 2.0A, 11-bit identifiers CANopen i.a.w. CiA 301, v4.0.2
<i>Bit Rate</i>	20, 50, 125, 250, 500, 800 or 1000 kbits/sec
Approvals	
CE	Directive 2004/108/EC
RoHS	Directive 2011/65/EU




Calibration / Programming Interface

The Visual Link™ software, with its intuitive, user-friendly PC interface, functions as a powerful configuration tool which allows the user to enter calibration and fluid property data, as well as configure the input and output signals. The software uses a toolbar with icons arranged in logical sequence to simplify the configuration of the microLink pickoff. Calibration and configuration data is stored in the microLink and can be recalled and viewed with the Visual Link™ software, allowing the user to have a record of the previous calibration along with a history of the instrument.

The microLink is typically factory configured by loading in calibration and fluid property data from the flowmeters calibration electronic data file, or entering the data manually. Data for kinematic viscosity and fluid density for the liquid being measured can be selected from a library file or entered manually. Visual Link™ utilizes either an Andrade or an ASTM correlation to perform viscosity calculation. Multiple flowmeter calibration files can be read and displayed simultaneously to assist with editing a Universal Viscosity Curve. The data can then be displayed on a graph in real-time for verification, or edited as needed for optimum characterization of the flowmeter.

Visual Link™ is a configuration tool which also provides fluid viscosity and density profiles, unit conversion for volume, viscosity and temperature, as well as other useful functions which support flow measurement. The software is designed to operate on a Windows® XP or 7 operating system.

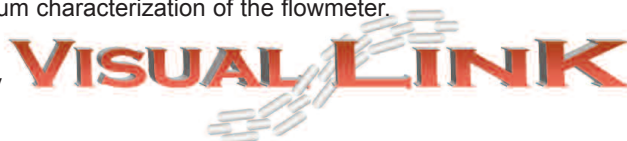

Model Numbering

ULN-C-1-00- ____

1 = Connector


5 = Flying leads with 1/2" NPT

6 = Flying leads without NPT

Programming Cable Kits


01-100754-101 for connector version (-1)

01-100754-102 flying lead versions (-5, -6)

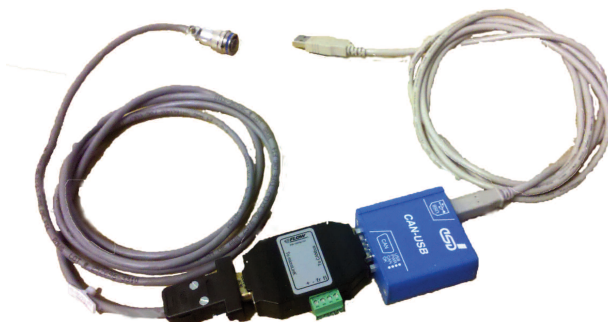

Dimensions

See technical manual for wiring information.

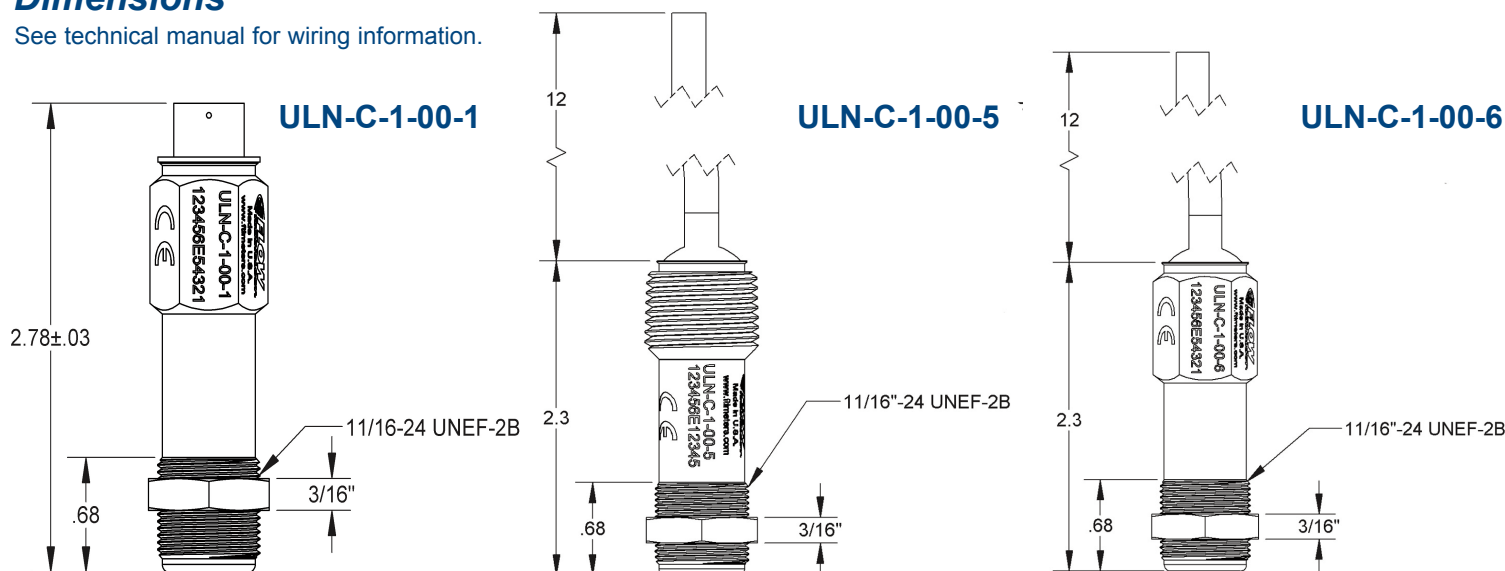

Connector

6-pin Mate
Backshell

FTI P/N 15-94965-01 (MS27473E8F35S)

FTI P/N 15-93357-01 (MS27506-A-8-2)



Specifications are for reference only and are subject to change without notice.



8930 S. Beck Avenue, Suite 107, Tempe, Arizona 85284 USA

Tel: (480) 240-3400 • Fax: (480) 240-3401 • Toll Free: 1-800-528-4225

E-mail: ftimarket@ftimeters.com • Web: www.ftimeters.com

DB-100397 Rev A © 2012 FTI Flow Technology, Inc. Printed in USA